

☑ SHT60

☑ SHT200


☑ SHT85

☑ SHT280




☑ SHT130

Order model




Specifications	structural form	reduction ratio	Motor specifications
SHT 60	05K	V1	
60	None: Standard type		V1: servo $\varnothing 8$ PCD45, M3
85	Z: Right angle type		V2: servo $\varnothing 8$ PCD46, M4
130	P: Planetary style		Compatible with 50-100W AC motors from various brands
200			T1: step $\varnothing 5$ PCD43.8, M3
280			T2: step $\varnothing 5$ PCD43.8, M3
450			Suitable for various brands of 42 type stepper motors




◆ SHT60-05K

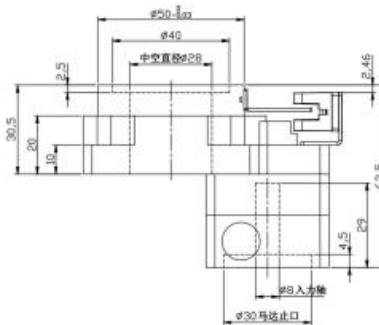

◆ SHT60P-20K

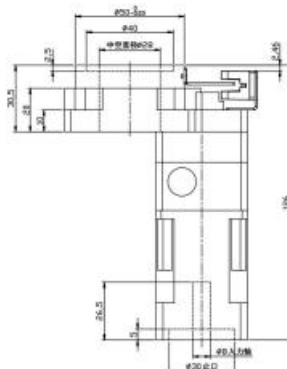


◆ SHT60Z-15K

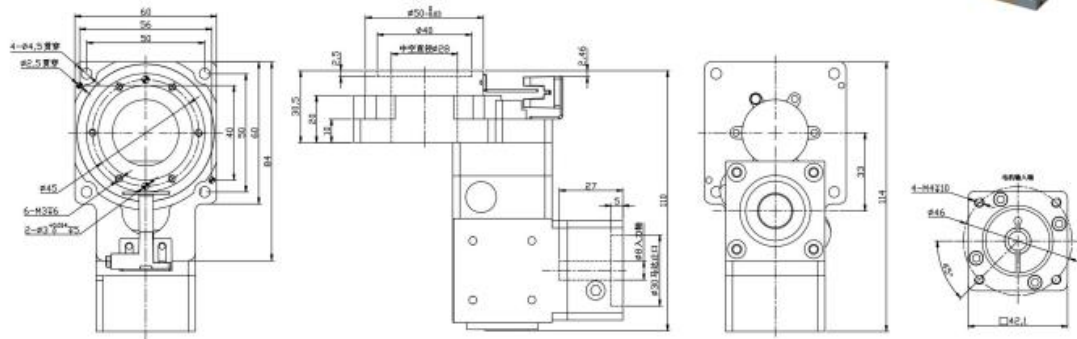



Order model

Specifications	structural form	reduction ratio	Motor specifications
SHT	85	-05K-	V1
60	None: Standard type		V1: servo ø14 PCD70, M4
85	Z: Right angle type		V2: servo ø14 PCD70, M5
130	P: Planetary style		Compatible with 200-400W AC motors from various brands
200			T1: step ø6.35 PCD66.67, M4
280			T2: step ø6.35 PCD70.7, M4
450			Suitable for various brands of 57-60 type stepper motors



◆ SHT85-05K

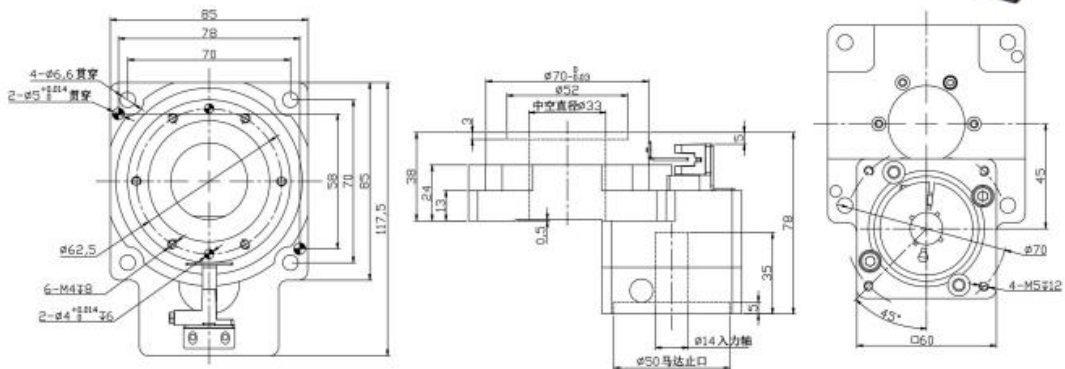





Suitable for various brands of 57-60 type stepper motors




◆ SHT130-10K


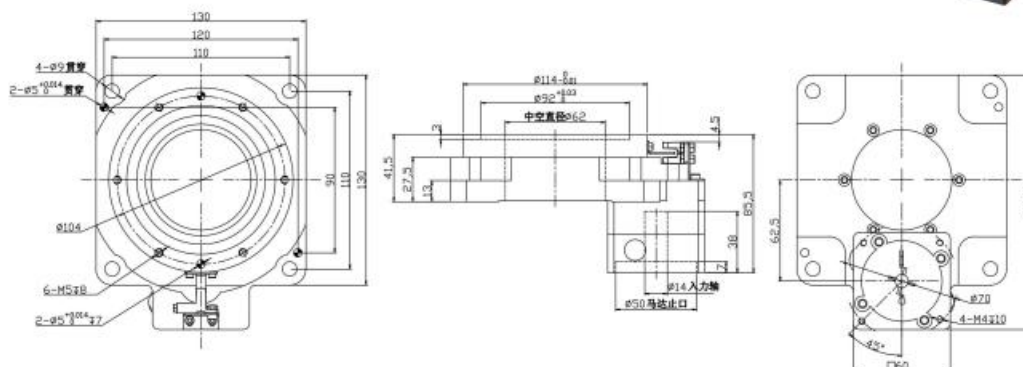



◆ SHT130P-50K

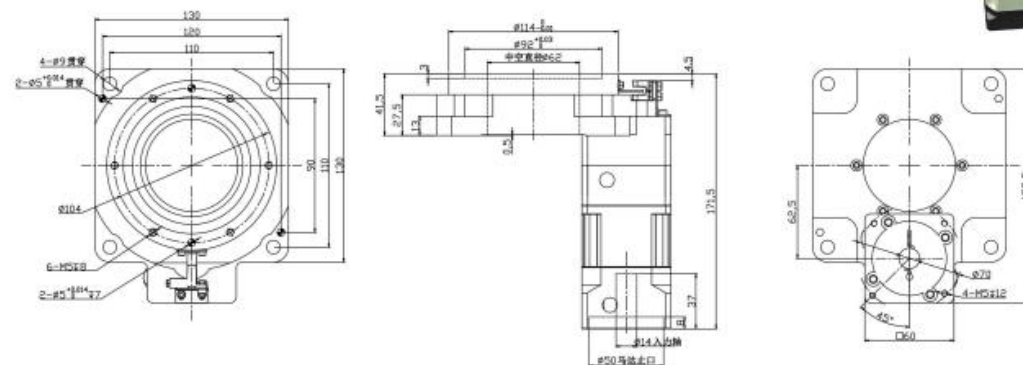

◆ SHT130Z-30K

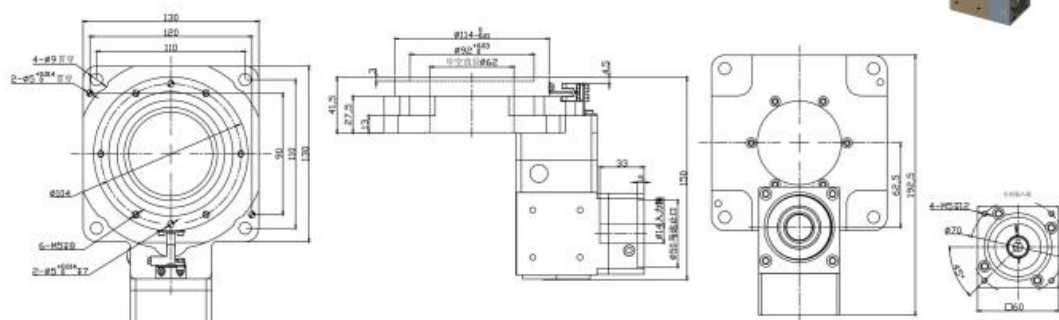



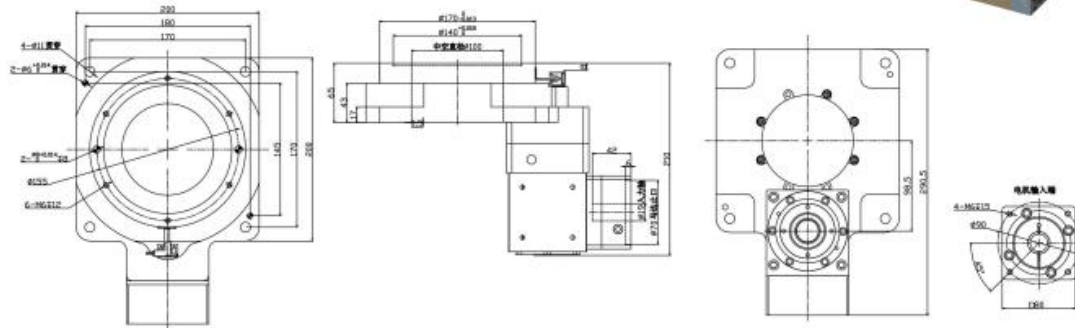

Order model

Specifications		structural form	reduction ratio	Motor specifications
SHT	280		10K	V1
	60	None: Standard type		V1: servo @22 PCD145, M8
	85	Z: Right angle type		V2: servo @24 PCD145, M8
	130	P: Planetary style		Compatible with 1000W AC motors from various brands
	200			
	280			
	450			

